

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
**WO 2004/066252 A1**

(51) International Patent Classification<sup>7</sup>: **G09G 3/34**

(21) International Application Number:  
PCT/IB2003/006340

(22) International Filing Date:  
24 December 2003 (24.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03100133.2 23 January 2003 (23.01.2003) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ZHOU, Guofu** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **JOHNSON, Mark, T.** [GB/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DIJCKMAN, Willibrordus, J.** [NL/NL]; c/o Prof. Holstlaan 6,

NL-5656 AA Eindhoven (NL). **CORTIE, Rogier, H., M.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **GEVEN, Albert** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTROPHORETIC DISPLAY PANEL AND DRIVING METHOD THEREFOR

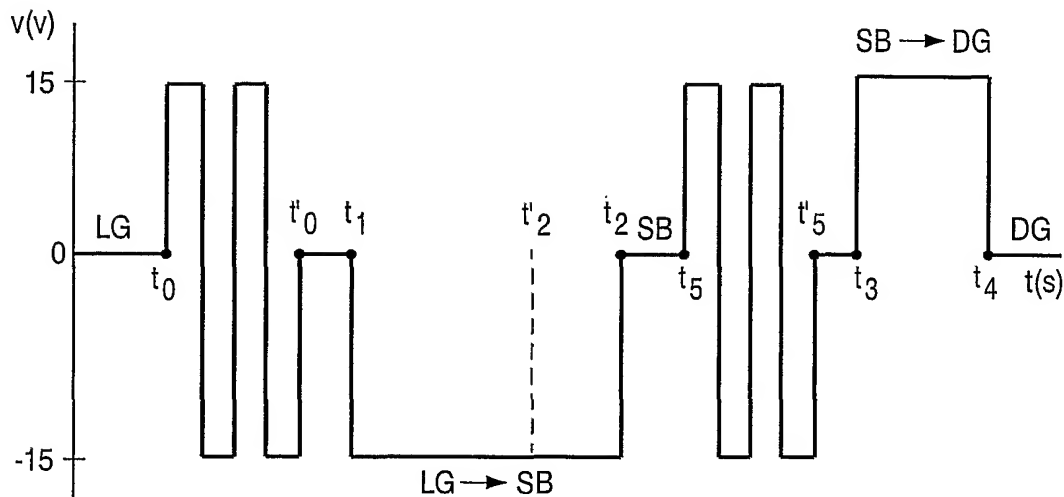

(57) Abstract: The electrophoretic display panel (1), for displaying a picture corresponding to image information, has drive means (100) which are arranged for controlling the potential difference of each picture element (2) to be a reset potential difference having a reset value and a reset duration for enabling particles (6) to substantially occupy one of the extreme positions, and subsequently to be a picture potential difference for enabling the particles (6) to occupy the position corresponding to the image information. For the display panel (1) to be able to provide a relatively high picture quality, the drive means (100) are further arranged for controlling the reset potential difference of each picture element (2) of at least a number of the picture elements (2) to have an additional reset duration.

WO 2004/066252 A1

**Declaration under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY,

KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## ELECTROPHORETIC DISPLAY PANEL AND DRIVING METHOD THEREFOR

The invention relates to an electrophoretic display panel, for displaying a picture corresponding to image information, comprising:

- an electrophoretic medium comprising charged particles;
- a plurality of picture elements;
- 5 - a first and a second electrode associated with each picture element for receiving a potential difference; and
- drive means,

the charged particles being able to occupy a position being one of extreme positions near the electrodes and intermediate positions in between the electrodes for displaying the picture, and

10 the drive means being arranged for controlling the potential difference of each picture element

- to be a reset potential difference having a reset value and a reset duration for enabling particles to substantially occupy one of the extreme positions, and subsequently
- to be a picture potential difference for enabling the particles to occupy the position
- 15 corresponding to the image information.

An embodiment of the electrophoretic display panel of the type mentioned in the opening paragraph is described in European Patent application 01200952.8

20 (PHNL010161).

In the described electrophoretic display panel, each picture element has, during the display of the picture, an appearance determined by the position of the particles. The position of the particles depends, however, not only on the potential difference but also on the history of the potential difference. As a result of the application of the reset potential

25 difference the dependency of the appearance of the picture element on the history is reduced, because particles substantially occupy one of the extreme positions. Subsequently, as a consequence of the picture potential difference, the particles occupy the position to display the picture corresponding to the image information. However, the dependency of the appearance of the picture element on the history is still relatively large and the picture being

displayed differs significantly from a picture being an exact representation of the image information. Therefore, the picture being displayed has a relatively low picture quality.

It is a drawback of the described display panel that it is difficult to obtain therewith a relatively high picture quality.

5

It is an object of the invention to provide a display panel of the kind mentioned in the opening paragraph which is able to provide a relatively high picture quality.

The object is thereby achieved that the drive means are further arranged for  
10 controlling the reset potential difference of each picture element of at least a number of the picture elements to have an additional reset duration.

An explanation might be as follows. For at least a number of the picture elements, denoted by subset, the reset potential difference of the display panel according to the invention has an additional reset duration. Therefore, for the subset the driving force  
15 driving particles towards one of the extreme positions is present for a longer interval in the display panel according to the invention than in the display panel of the said patent application. As a result, the number of the particles that are able to occupy one of the extreme positions as a consequence of the additional reset potential difference is larger for the display panel according to the invention. Therefore, in the display panel according to the invention a  
20 larger number of the particles will have a position which is extreme and thereby predetermined prior to the application of the picture potential difference, resulting in a reduced dependency of the appearance of the picture element on the history.

It has been observed that particularly additional reset durations larger than one tenth of a reference duration largely reduce the dependency of the appearance of the picture  
25 element on the history. The reference duration of a picture element is equal to a duration to change the position of particles of the picture element from one of the extreme positions to the other one of the extreme positions. Furthermore, additional reset durations larger than three times the reference duration hardly reduce the dependency of the appearance of the picture element on the history any further compared to an additional reset durations equal to  
30 three times the reference duration, whereas these relatively large additional durations have a negative effect on e.g. the power consumption and the picture update time. Therefore, it is favorable, if the additional reset duration of each picture element of the subset is larger than one tenth of the respective reference duration and smaller than three times the respective reference duration.

It is also favorable, if each picture element is one of the number of the picture elements. Then the subset is equal to the plurality of picture elements and for each picture element of the display panel the dependency of the appearance on the history is reduced.

It is also favorable, if for each picture element the respective reset duration and  
5 the respective additional reset duration have a respective sum being substantially equal to a constant. Then the reset potential differences can be controlled relatively simply by the drive means.

It is furthermore favorable, if the display panel is able to display an estimate of  
the picture corresponding to the image information as a consequence of the reset potential  
10 differences, as then an observer perceives a relatively smooth transition from a picture  
displayed prior to the application of the reset potential differences via the estimate of the  
picture corresponding to the image information to the picture corresponding to the image  
information. To achieve this, the drive means are further arranged for controlling the reset  
potential difference of each picture element to enable particles to occupy the extreme position  
15 which is closest to the position of the particles which corresponds to the image information.

If the picture elements are arranged along substantially straight lines, and  
the picture elements have substantially equal first appearances if particles substantially  
occupy one of the extreme positions, and  
the picture elements have substantially equal second appearances if particles substantially  
20 occupy the other one of the extreme positions, and  
the drive means are further arranged for controlling the reset potential differences of  
subsequent picture elements along each line to enable particles to substantially occupy  
unequal extreme positions, the observer perceives a rather smooth transition from the picture  
displayed prior to the application of the reset potential differences via a picture representing  
25 an average of the first and the second appearances as a result of the reset potential differences  
to the picture corresponding to the image information. If e.g. the first appearance is white and  
the second appearance is black, the picture representing an average of the first and the second  
appearances represents substantially middle gray.

It is furthermore favorable, if the picture elements are arranged along  
30 substantially straight rows and along substantially straight columns being substantially  
perpendicular to the rows in a two-dimensional structure, each row having a predetermined  
first number of picture elements, each column having a predetermined second number of  
picture elements, and

the picture elements have substantially equal first appearances if particles substantially occupy one of the extreme positions, and

the picture elements have substantially equal second appearances if particles substantially occupy the other one of the extreme positions, and

5 the drive means are further arranged for controlling the reset potential differences of subsequent picture elements along each row to enable particles to substantially occupy unequal extreme positions, and

the drive means are further arranged for controlling the reset potential differences of subsequent picture elements along each column to enable particles to substantially occupy

10 unequal extreme positions. The observer perceives a rather smooth transition from the picture displayed prior to the application of the reset potential differences via a picture representing an average of the first and the second appearances to the picture corresponding to the image information. If e.g. the first appearance is back and the second appearance is white, the picture representing an average of the first and the second appearances represents  
15 substantially middle gray, which is somewhat smoother compared to the previous embodiment.

It is furthermore favorable, if the drive means are further able to control for each picture element the potential difference to be a sequence of preset potential differences before being the reset potential difference, the sequence of preset potential differences having  
20 preset values and associated preset durations, the preset values in the sequence alternating in sign, each preset potential difference representing a preset energy sufficient to release particles present in one of said extreme positions from their position but insufficient to enable said particles to reach the other one of the extreme positions. As an advantage, the sequences of preset potential differences reduce the dependency of the appearances of the picture  
25 elements on the history of the potential difference. Such sequences of preset values are described in the non-prepublished European Patent application 02077017.8 (PHNL020441).

Furthermore, it is favorable, if the drive means are further arranged for controlling the potential difference of each picture element of the number of the picture elements to be a further sequence of preset potential differences between being the reset potential difference  
30 and the picture potential difference. As an advantage, the further sequences of preset potential differences further reduce the dependency of the appearances of the picture elements on the history of the potential difference.

These and other aspects of the display panel of the invention will be further elucidated and described with reference to the drawings, in which:

Figure 1 shows diagrammatically a front view of an embodiment of the display panel;

5           Figure 2 shows diagrammatically a cross-sectional view along II-II in Figure 1;

Figure 3A shows diagrammatically the potential difference as a function of time for a picture element of the subset for the embodiment;

10           Figure 3B shows diagrammatically the potential difference as a function of time for a picture element of the subset in a variation of the embodiment;

Figure 4A shows diagrammatically the potential difference as a function of time for a picture element of the subset in another variation of the embodiment;

15           Figure 4B shows diagrammatically the potential difference as a function of time for another picture element of the subset in the same variation of the embodiment associated with Figure 4A;

Figure 5 shows the picture representing an average of the first and the second appearances as a result of the reset potential differences in another variation of the embodiment;

20           Figure 6 shows the picture representing an average of the first and the second appearances as a result of the reset potential differences in another variation of the embodiment;

Figure 7 shows diagrammatically the potential difference as a function of time for a picture element of the subset in another variation of the embodiment, and

25           Figure 8 shows diagrammatically the potential difference as a function of time for a picture element of the subset in another variation of the embodiment.

In all the Figures corresponding parts are referenced to by the same reference numerals.

30           Figures 1 and 2 show the embodiment of the display panel 1 having a first substrate 8, a second opposed substrate 9 and a plurality of picture elements 2. Preferably, the picture elements 2 are arranged along substantially straight lines in a two-dimensional structure. Other arrangements of the picture elements 2 are alternatively possible, e.g. a honeycomb arrangement. An electrophoretic medium 5, having charged particles 6, is present

between the substrates 8,9. A first and a second electrode 3,4 are associated with each picture element 2. The electrodes 3,4 are able to receive a potential difference. In Figure 2 the first substrate 8 has for each picture element 2 a first electrode 3, and the second substrate 9 has for each picture element 2 a second electrode 4. The charged particles 6 are able to occupy extreme positions near the electrodes 3,4 and intermediate positions in between the electrodes 3,4. Each picture element 2 has an appearance determined by the position of the charged particles 6 between the electrodes 3,4 for displaying the picture. Electrophoretic media 5 are known per se from e.g. US 5,961,804, US 6,120,839 and US 6,130,774 and can e.g. be obtained from E Ink Corporation. As an example, the electrophoretic medium 5 comprises negatively charged black particles 6 in a white fluid. When the charged particles 6 are in a first extreme position, i.e. near the first electrode 3, as a result of the potential difference being e.g. 15 Volts, the appearance of the picture element 2 is e.g. white. Here it is considered that the picture element 2 is observed from the side of the second substrate 9. When the charged particles 6 are in a second extreme position, i.e. near the second electrode 4, as a result of the potential difference being of opposite polarity, i.e. -15 Volts, the appearance of the picture element 2 is black. When the charged particles 6 are in one of the intermediate positions, i.e. in between the electrodes 3,4, the picture element 2 has one of the intermediate appearances, e.g. light gray, middle gray and dark gray, which are gray levels between white and black. The drive means 100 are arranged for controlling the potential difference of each picture element 2 to be a reset potential difference having a reset value and a reset duration for enabling particles 6 to substantially occupy one of the extreme positions, and subsequently to be a picture potential difference for enabling the particles 6 to occupy the position corresponding to the image information. Furthermore, the drive means 100 are arranged for controlling the reset potential difference of each picture element 2 of the subset to have an additional reset duration.

As an example the appearance of a picture element 2 of the subset is light gray, denoted as LG, before application of the reset potential difference. Furthermore, the picture appearance corresponding to the image information of the picture element 2 is dark gray, denoted as DG. For this example, the potential difference of the picture element 2 is shown as a function of time in Figure 3. The reset potential difference has e.g. a value of 15 Volts and is present from time t1 to time t2, the portion from time t1 to time t2' being the reset duration and the portion from time t2' to time t2 being the additional reset duration. The reset duration and the additional reset duration are e.g. 50 ms and 250 ms, respectively. As a result the picture element 2 has an appearance being substantially white, denoted as SW. The



picture potential difference is present from time t3 to time t4 and has a value of e.g. -15 Volts and a duration of e.g. 150 ms. As a result the picture element 2 has an appearance being dark gray, for displaying the picture. The interval from time t2 to time t3 may be absent.

The reference duration for each picture element 2 of the subset is equal to the duration to change the position of particles 6 of the respective picture element 2 from one of the extreme positions to the other one of the extreme positions. For the picture element 2 in the example the reference duration is e.g. 200 ms. In a variation of the embodiment the additional reset duration of each picture element 2 of the subset is larger than one tenth of the respective reference duration and smaller than three times the respective reference duration.

It is favorable, if the subset is equal to the plurality of picture elements 2. Then, for each picture element 2 of the display panel the dependency of the appearance on the history is reduced.

In a further variation of the embodiment for each picture element 2 the respective reset duration and the respective additional reset duration have a respective sum being substantially equal to a constant. As an example the potential difference of a picture element 2 in this variation is shown as a function of time in Figure 3B. The appearance of the picture element 2 is dark gray before application of the reset potential difference.

Furthermore, the picture appearance corresponding to the image information of the picture element 2 is light gray. The reset potential difference has e.g. a value of 15 Volts and is present from time t1 to time t2. The reset duration and the additional reset duration are e.g. 150 ms and 150 ms, respectively. As a result the picture element 2 has an appearance being substantially white. The picture potential difference is present from time t3 to time t4 and has e.g. a value of e.g. -15 Volts and a duration of e.g. 50 ms. As a result the picture element 2 has an appearance being light gray, for displaying the picture. The sum of the reset duration and the additional reset duration of the reset potential difference of the picture element 2 associated with Figure 3A is equal to the sum of the reset duration and the additional reset duration of the reset potential difference of the picture element 2 associated with Figure 3B, and equal to the constant, in this example being 300 ms.

In another variation of the embodiment the drive means 100 are further arranged for controlling the reset potential difference of each picture element 2 to enable particles 6 to occupy the extreme position which is closest to the position of the particles 6 which corresponds to the image information. As an example the appearance of a picture element 2 is light gray before application of the reset potential difference. Furthermore, the picture appearance corresponding to the image information of the picture element 2 is dark

gray. For this example, the potential difference of the picture element 2 is shown as a function of time in Figure 4A. The reset potential difference has e.g. a value of -15 Volts and is present from time t1 to time t2. The reset duration and the additional reset duration are e.g. 150 ms and 100 ms, respectively. As a result, the particles 6 occupy the second extreme position and the picture element 2 has a substantially black appearance, denoted as SB, which is closest to the position of the particles 6 which corresponds to the image information, i.e. the picture element 2 having a dark gray appearance. The picture potential difference is present from time t3 to time t4 and has e.g. a value of e.g. 15 Volts and a duration of e.g. 50 ms. As a result the picture element 2 has an appearance being dark gray, for displaying the picture. As another example the appearance of another picture element 2 is light gray before application of the reset potential difference. Furthermore, the picture appearance corresponding to the image information of this picture element 2 is substantially white. For this example, the potential difference of the picture element 2 is shown as a function of time in Figure 4B. The reset potential difference has e.g. a value of 15 Volts and is present from time t1 to time t2. The reset duration and the additional reset duration are e.g. 50 ms and 100 ms, respectively. As a result, the particles 6 occupy the first extreme position and the picture element 2 has a substantially white appearance, which is closest to the position of the particles 6 which corresponds to the image information, i.e. the picture element 2 having a substantially white appearance. The picture potential difference is present from time t3 to time t4 and has a value of 0 Volts because the appearance is already substantially white, for displaying the picture.

In Figure 5 the picture elements 2 are arranged along substantially straight lines 30. The picture elements 2 have substantially equal first appearances, e.g. white, if particles 6 substantially occupy one of the extreme positions, e.g. the first extreme position. The picture elements 2 have substantially equal second appearances, e.g. black, if particles 6 substantially occupy the other one of the extreme positions, e.g. the second extreme position. The drive means 100 are further arranged for controlling the reset potential differences of subsequent picture elements 2 along on each line 30 to enable particles 6 to substantially occupy unequal extreme positions. Figure 5 shows the picture representing an average of the first and the second appearances as a result of the reset potential differences. The picture represents substantially middle gray.

In Figure 6 the picture elements 2 are arranged along substantially straight rows 31 and along substantially straight columns 32 being substantially perpendicular to the rows in a two-dimensional structure, each row 31 having a predetermined first number of

picture elements 2, e.g. 4 in Figure 6, each column 32 having a predetermined second number of picture elements 2, e.g. 3 in Figure 6. The picture elements 2 have substantially equal first appearances, e.g. white, if particles 6 substantially occupy one of the extreme positions, e.g. the first extreme position. The picture elements 2 have substantially equal second  
5 appearances, e.g. black, if particles 6 substantially occupy the other one of the extreme positions, e.g. the second extreme position. The drive means 100 are further arranged for controlling the reset potential differences of subsequent picture elements 2 along on each row 31 to enable particles 6 to substantially occupy unequal extreme positions, and the drive means 100 are further arranged for controlling the reset potential differences of  
10 subsequent picture elements 2 along on each column 32 to enable particles 6 to substantially occupy unequal extreme positions. Figure 6 shows the picture representing an average of the first and the second appearances as a result of the reset potential differences. The picture represents substantially middle gray, which is somewhat smoother compared to the previous embodiment.

15 In another variation of the embodiment the drive means 100 are further arranged for controlling the potential difference of each picture element 2 of the number to be a sequence of preset potential differences before being the reset potential difference. Furthermore, the sequence of preset potential differences has preset values and associated preset durations, the preset values in the sequence alternate in sign, each preset potential  
20 difference represents a preset energy sufficient to release particles 6 present in one of the extreme positions from their position but insufficient to enable said particles 6 to reach the other one of the extreme positions. As an example the appearance of a picture element 2 is light gray before the application of the sequence of preset potential differences. Furthermore, the picture appearance corresponding to the image information of the picture element 2 is  
25 dark gray. For this example, the potential difference of the picture element 2 is shown as a function of time in Figure 7. In the example, the sequence of preset potential differences has 4 preset values, subsequently 15 Volts, -15 Volts, 15 Volts and -15 Volts, applied from time  $t_0$  to time  $t_0'$ . Each preset value is applied for e.g. 20 ms. The time interval between  $t_0'$  and  $t_1$  is negligibly small. Subsequently, the reset potential difference has e.g. a value of -15  
30 Volts and is present from time  $t_1$  to time  $t_2$ . The reset duration and the additional reset duration are e.g. 150 ms and 50 ms, respectively. As a result, the particles 6 occupy the second extreme position and the picture element 2 has a substantially black appearance. The picture potential difference is present from time  $t_3$  to time  $t_4$  and has e.g. a value of e.g. 15 Volts and a duration of e.g. 50 ms. As a result the picture element 2 has an appearance being

dark gray, for displaying the picture. In another variation the drive means 100 are further arranged for controlling the potential difference of each picture element 2 of the number of the picture elements 2 to be a further sequence of preset potential differences between being the reset potential difference and the picture potential difference. As an example the appearance of a picture element 2 is light gray before the application of the sequence of preset potential differences. Furthermore, the picture appearance corresponding to the image information of the picture element 2 is dark gray. For this example, the potential difference of the picture element 2 is shown as a function of time in Figure 8. In the example, the sequence of preset potential differences and the reset potential difference are e.g. equal to the respective potential differences as shown in Figure 7. As a result, the particles 6 occupy the second extreme position and the picture element 2 has a substantially black appearance. In the example, the further sequence of preset potential differences has e.g. 4 preset values, subsequently 15 Volts, -15 Volts, 15 Volts and -15 Volts, applied from time  $t_5$  to time  $t_5'$ . Each preset value is applied for e.g. 20 ms. The number of preset potential differences, the preset values and the associated preset durations in the further sequence can be chosen independently from the number of preset potential differences, the preset values and the associated preset durations in the sequence. The time intervals between  $t_2$  and  $t_5$  and between  $t_5'$  and  $t_3$  can be negligibly small. The picture potential difference is present from time  $t_3$  to time  $t_4$  and has e.g. a value of e.g. 15 Volts and a duration of e.g. 50 ms. As a result the picture element 2 has an appearance being dark gray, for displaying the picture.

## CLAIMS:

1. An electrophoretic display panel (1), for displaying a picture corresponding to image information, comprising:

- an electrophoretic medium (5) comprising charged particles (6);
- a plurality of picture elements (2);

5 - a first and a second electrode (3,4) associated with each picture element (2) for receiving a potential difference; and

- drive means (100) ,

the charged particles (6) being able to occupy a position being one of extreme positions near the electrodes (3,4) and intermediate positions in between the electrodes (3,4) for displaying

10 the picture, and

the drive means (100) being arranged for controlling the potential difference of each picture element (2)

- to be a reset potential difference having a reset value and a reset duration for enabling particles (6) to substantially occupy one of the extreme positions, and subsequently

15 - to be a picture potential difference for enabling the particles (6) to occupy the position corresponding to the image information,

characterized in that

the drive means (100) are further arranged for controlling the reset potential difference of each picture element (2) of at least a number of the picture elements (2) to have an additional

20 reset duration.

2. A display panel (1) as claimed in claim 1 characterized in that each additional reset duration is larger than one tenth of a reference duration and smaller than three times the reference duration, the reference duration being equal to a duration to change the position of particles (6) of the respective picture element (2) from one of the extreme positions to the other one of the extreme positions.

25

3. A display panel (1) as claimed in claim 1 or 2 characterized in that each picture element (2) is one of the number of the picture elements (2).

4. A display panel (1) as claimed in claim 3 characterized in that for each picture element (2) the respective reset duration and the respective additional reset duration have a respective sum being substantially equal to a constant.

5. A display panel (1) as claimed in any of the claims 1 to 4 characterized in that the drive means (100) are further arranged for controlling the reset potential difference of each picture element (2) to enable particles (6) to occupy the extreme position which is closest to the position of the particles (6) which corresponds to the image information.

6. A display panel (1) as claimed in claim 3 characterized in that the picture elements (2) are arranged along substantially straight lines (30), and the picture elements (2) have substantially equal first appearances if particles (6) substantially occupy one of the extreme positions, and the picture elements (2) have substantially equal second appearances if particles (6) substantially occupy the other one of the extreme positions, and the drive means (100) are further arranged for controlling the reset potential differences of subsequent picture elements (2) along each line (30) to enable particles (6) to substantially occupy unequal extreme positions.

7. A display panel (1) as claimed in claim 3 characterized in that the picture elements (2) are arranged along substantially straight rows (31) and along substantially straight columns (32) being substantially perpendicular to the rows (31) in a two-dimensional structure, each row (31) having a predetermined first number of picture elements (2), each column (32) having a predetermined second number of picture elements (2), and the picture elements (2) have substantially equal first appearances if particles (6) substantially occupy one of the extreme positions, and the picture elements (2) have substantially equal second appearances if particles (6) substantially occupy the other one of the extreme positions, and the drive means (100) are further arranged for controlling the reset potential differences of subsequent picture elements (2) along each row (31) to enable particles (6) to substantially occupy unequal extreme positions, and

the drive means (100) are further arranged for controlling the reset potential differences of subsequent picture elements (2) along each column (32) to enable particles (6) to substantially occupy unequal extreme positions.

5     8.             A display panel (1) as claimed in any of the claims 1 to 7 characterized in that the drive means (100) are further arranged for controlling the potential difference of each picture element (2) of the number of the picture elements (2) to be a sequence of preset potential differences before being the reset potential difference, the sequence of preset potential differences having preset values and associated preset durations, the preset values in  
10 the sequence alternating in sign, each preset potential difference representing a preset energy sufficient to release particles (6) present in one of said extreme positions from their position but insufficient to enable said particles (6) to reach the other one of the extreme positions.

9.             A display panel (1) as claimed claim 8 characterized in that the drive means  
15 (100) are further arranged for controlling the potential difference of each picture element (2) of the number of the picture elements (2) to be a further sequence of preset potential differences between being the reset potential difference and the picture potential difference.

1/5

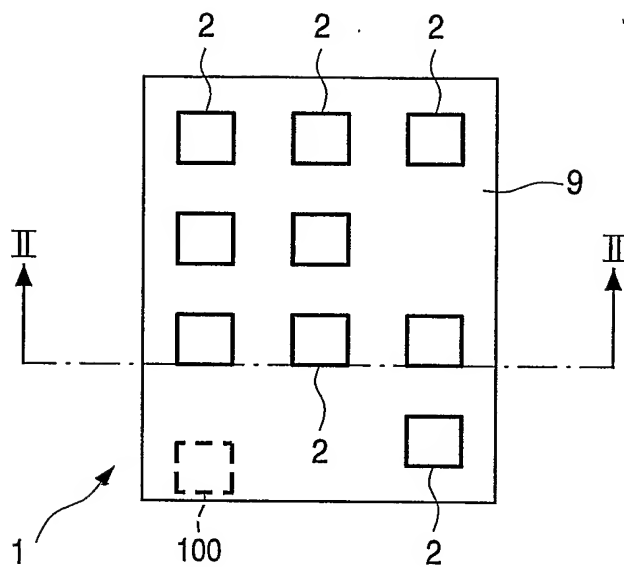


FIG. 1

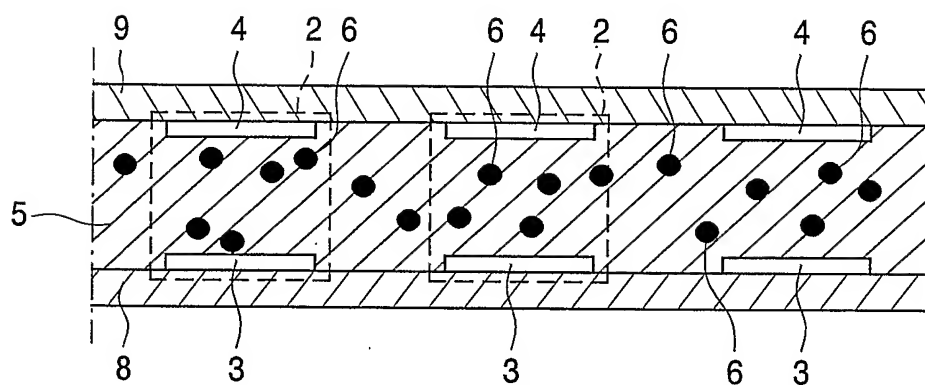


FIG. 2



2/5

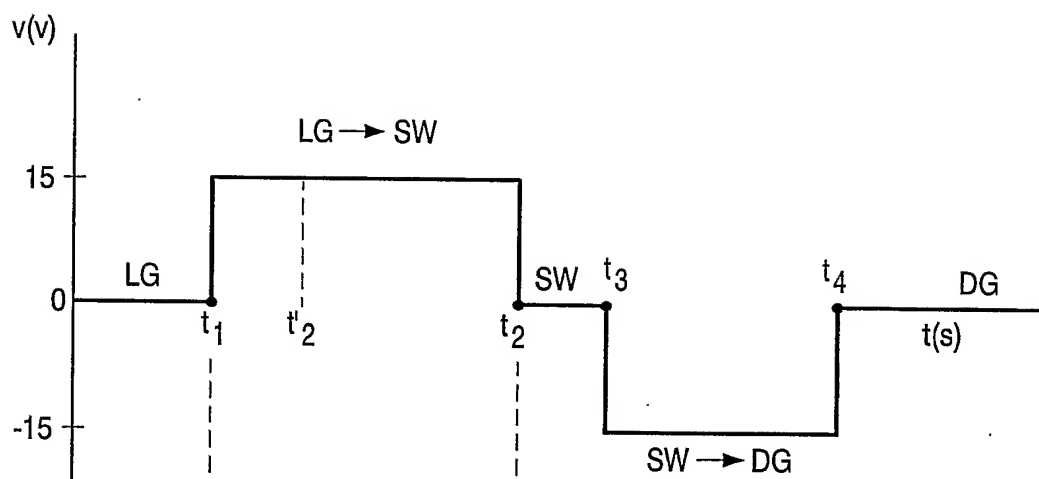


FIG. 3A

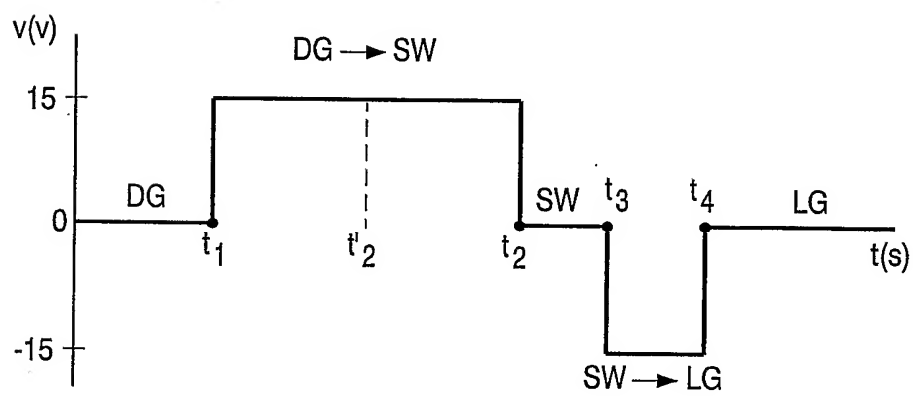


FIG. 3B

3/5

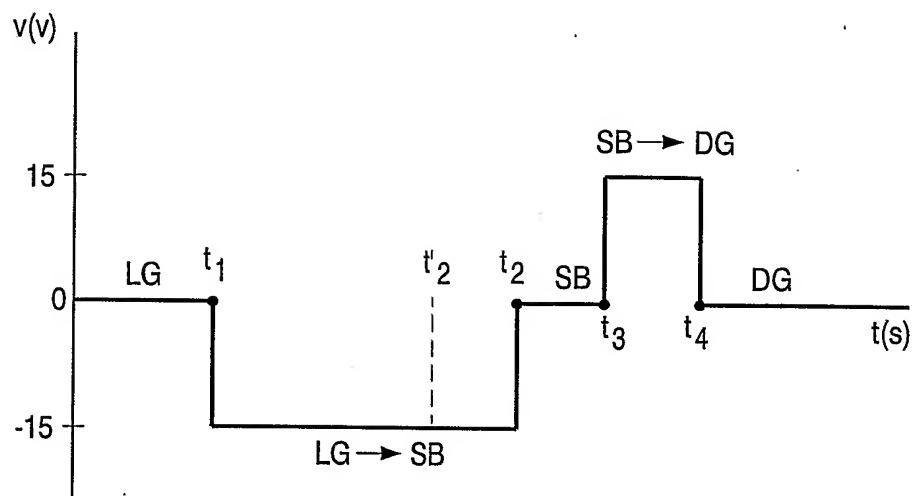


FIG. 4A

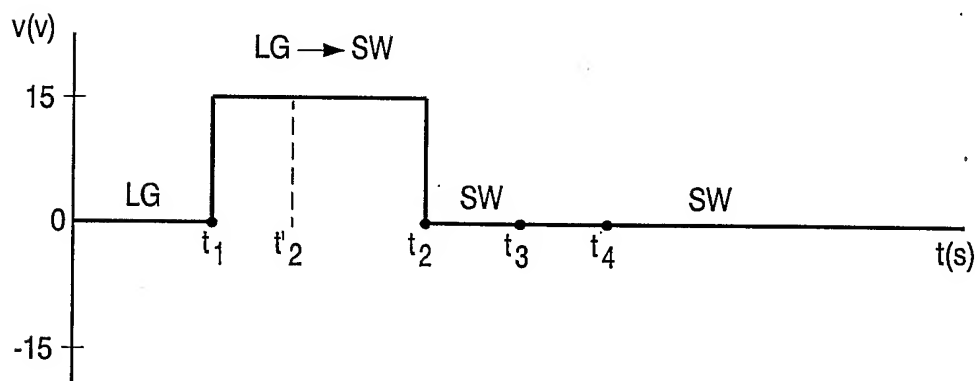


FIG. 4B

4/5

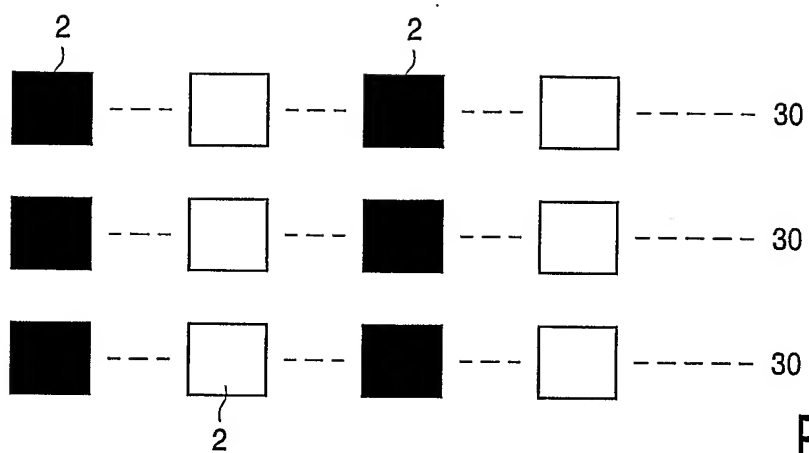


FIG. 5

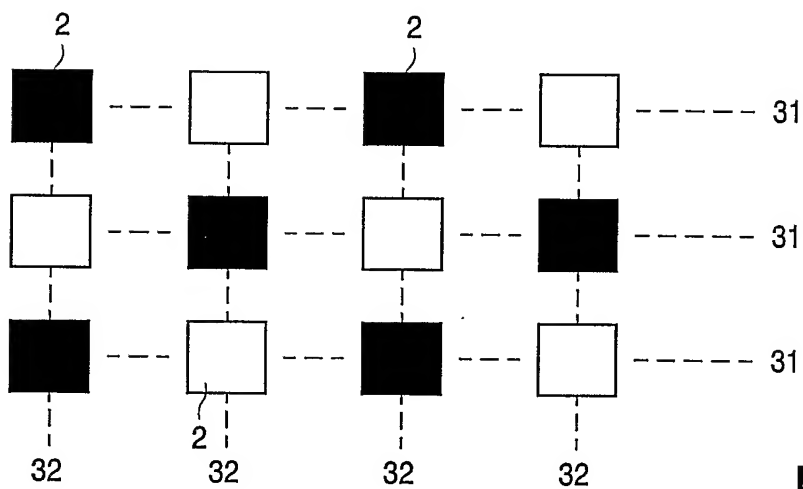


FIG. 6

5/5

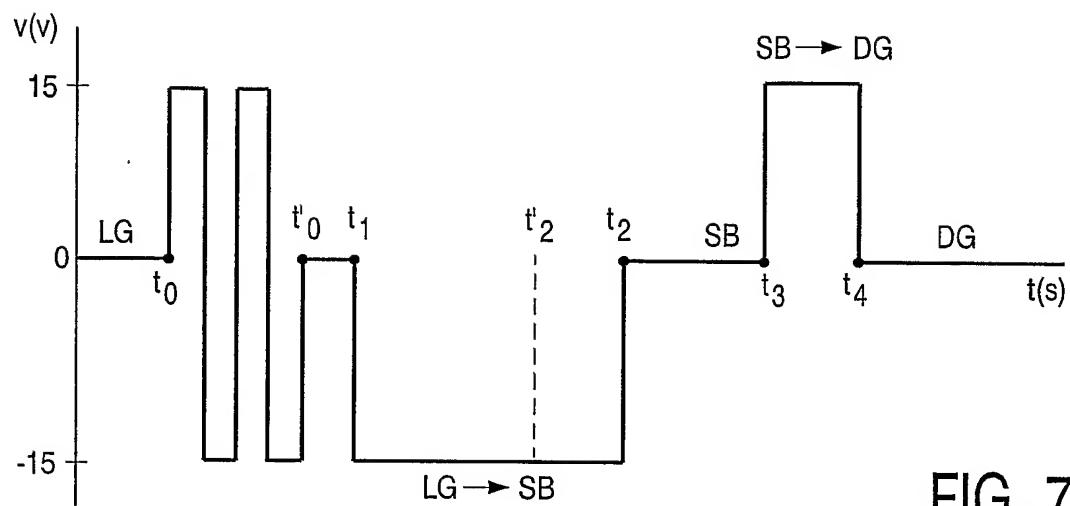


FIG. 7

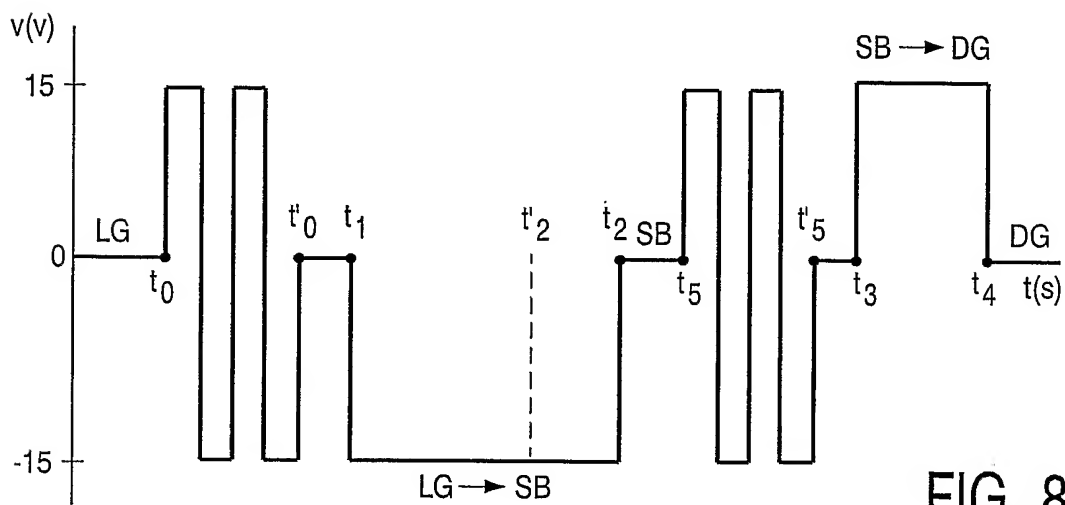


FIG. 8

# INTERNATIONAL SEARCH REPORT

In Application No  
PCT/IB 03/06340

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G09G3/34

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2002/005832 A1 (KATASE MAKOTO) 17 January 2002 (2002-01-17) abstract paragraph '0091! - paragraph '0136!; figures 8-14 paragraph '0150! - paragraph '0159!; figures 18-20 the whole document	1 2-9
X A	US 2002/021483 A1 (KATASE MAKOTO) 21 February 2002 (2002-02-21) abstract the whole document	1 2-5
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

1 April 2004

Date of mailing of the international search report

13/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Wolff, L

# INTERNATIONAL SEARCH REPORT

In Application No  
PCT/IB 03/06340

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 6 236 385 B1 (INOUE AKIRA ET AL)  22 May 2001 (2001-05-22)  abstract  column 1, line 12 - line 20  column 22, line 1 - line 40  column 23, line 50 -column 27, line 50  column 30, line 64 -column 31, line 35  -----</p>	1-5,8,9
A	<p>US 4 041 481 A (SATO TERUO)  9 August 1977 (1977-08-09)  abstract; figures 1,7  column 2, line 48 -column 3, line 5  column 3, line 44 -column 4, line 36  claims 1-3  -----</p>	1-5,8,9

# INTERNATIONAL SEARCH REPORT

In Application No  
PCT/IB 03/06340

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2002005832	A1	17-01-2002	JP 2002116734 A	19-04-2002
US 2002021483	A1	21-02-2002	JP 2002116733 A	19-04-2002
			US 2004051935 A1	18-03-2004
US 6236385	B1	22-05-2001	JP 3489169 B2	19-01-2004
			JP 7175041 A	14-07-1995
			US 5835075 A	10-11-1998
			DE 69424330 D1	15-06-2000
			DE 69424330 T2	09-11-2000
			DE 69428465 D1	31-10-2001
			DE 69428465 T2	25-04-2002
			EP 0613116 A2	31-08-1994
			EP 0866441 A1	23-09-1998
			HK 1014288 A1	29-12-2000
			JP 2001228461 A	24-08-2001
			JP 2001228462 A	24-08-2001
			JP 2001235726 A	31-08-2001
			KR 238903 B1	15-01-2000
			SG 72608 A1	23-05-2000
			US 5684503 A	04-11-1997
US 4041481	A	09-08-1977	JP 973865 C	19-10-1979
			JP 51041993 A	08-04-1976
			JP 54006360 B	27-03-1979
			JP 946920 C	30-03-1979
			JP 51041995 A	08-04-1976
			JP 53027152 B	07-08-1978